

10/506765

Fig. 1

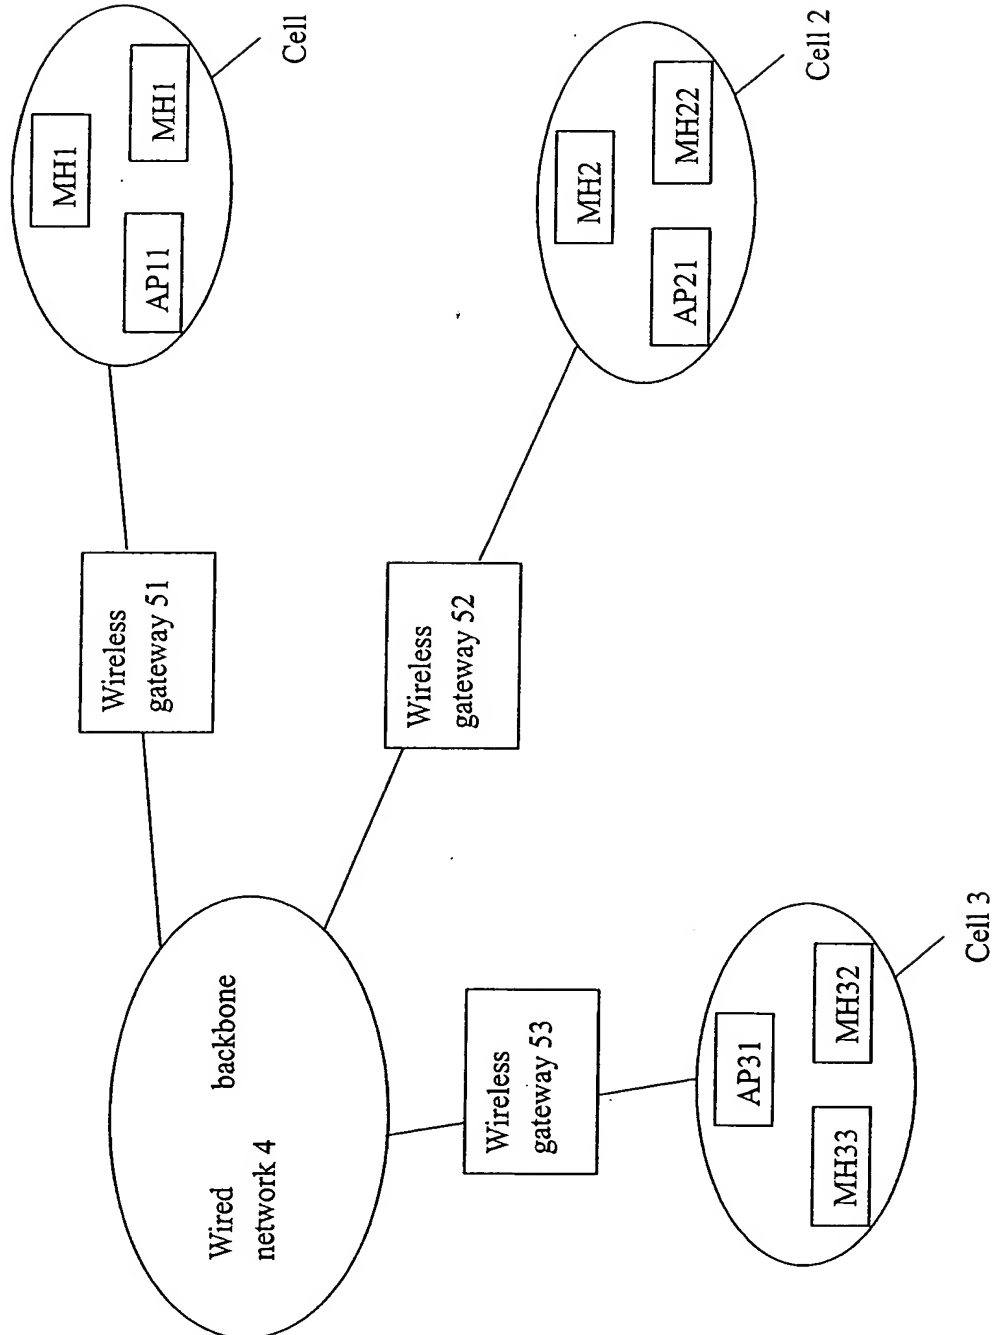


Fig. 2a


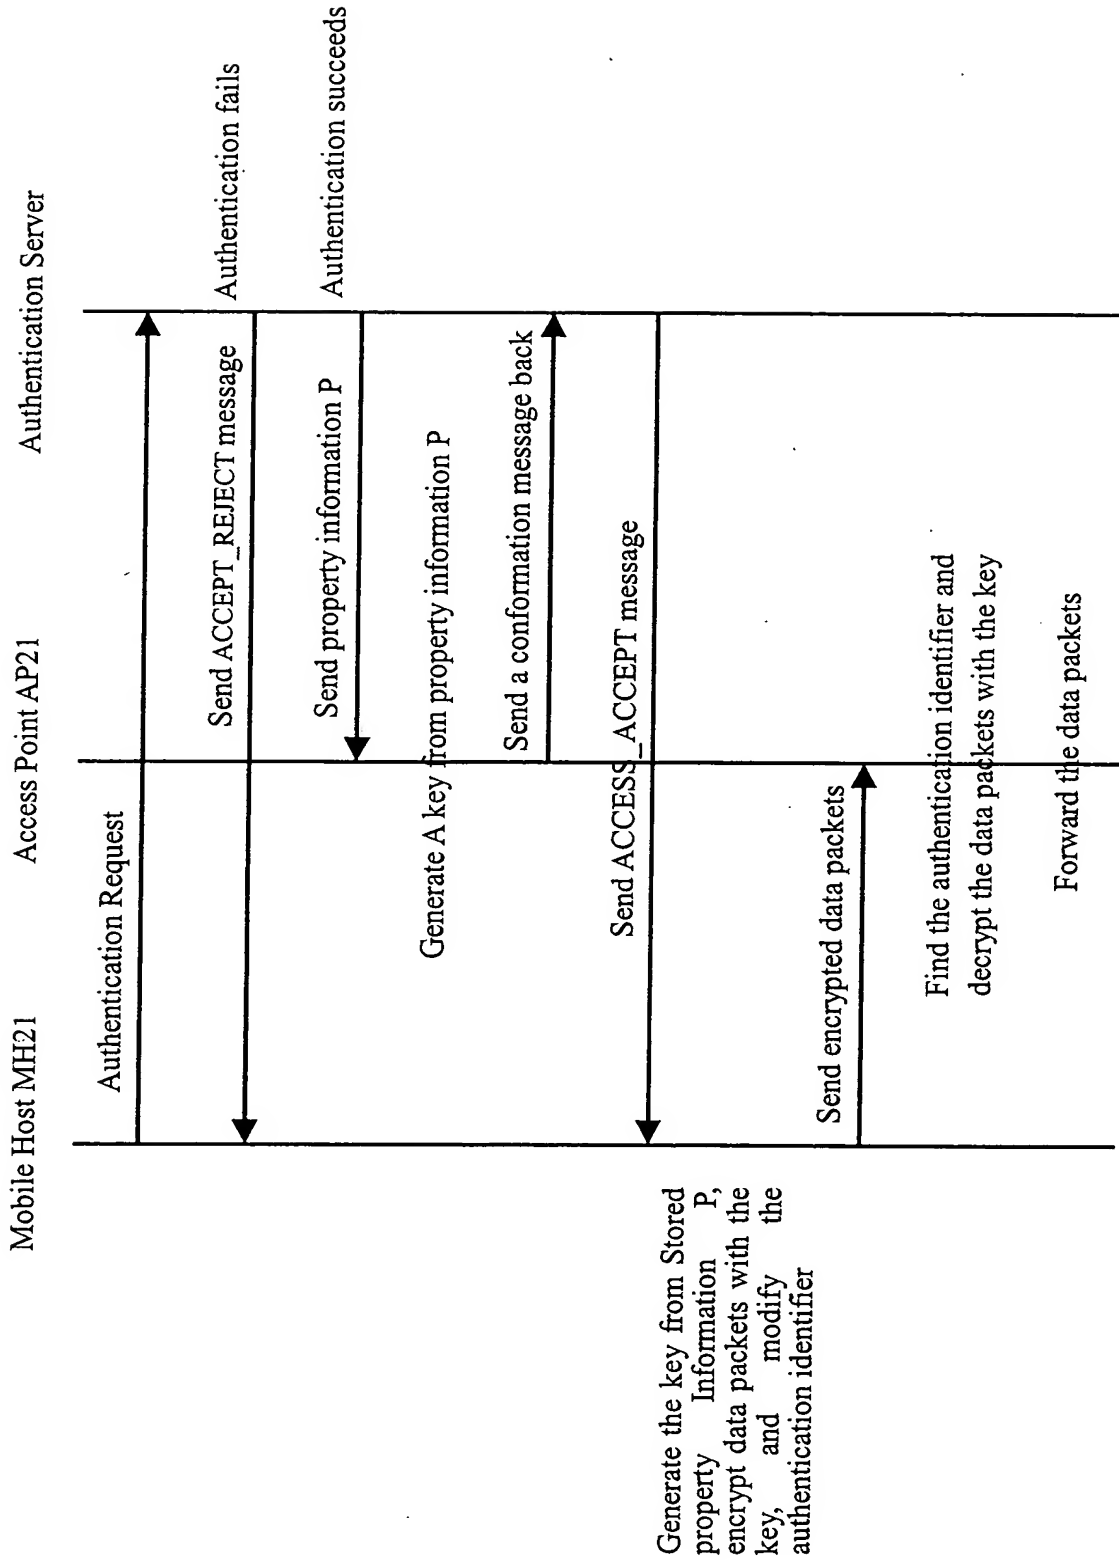


Fig. 2b

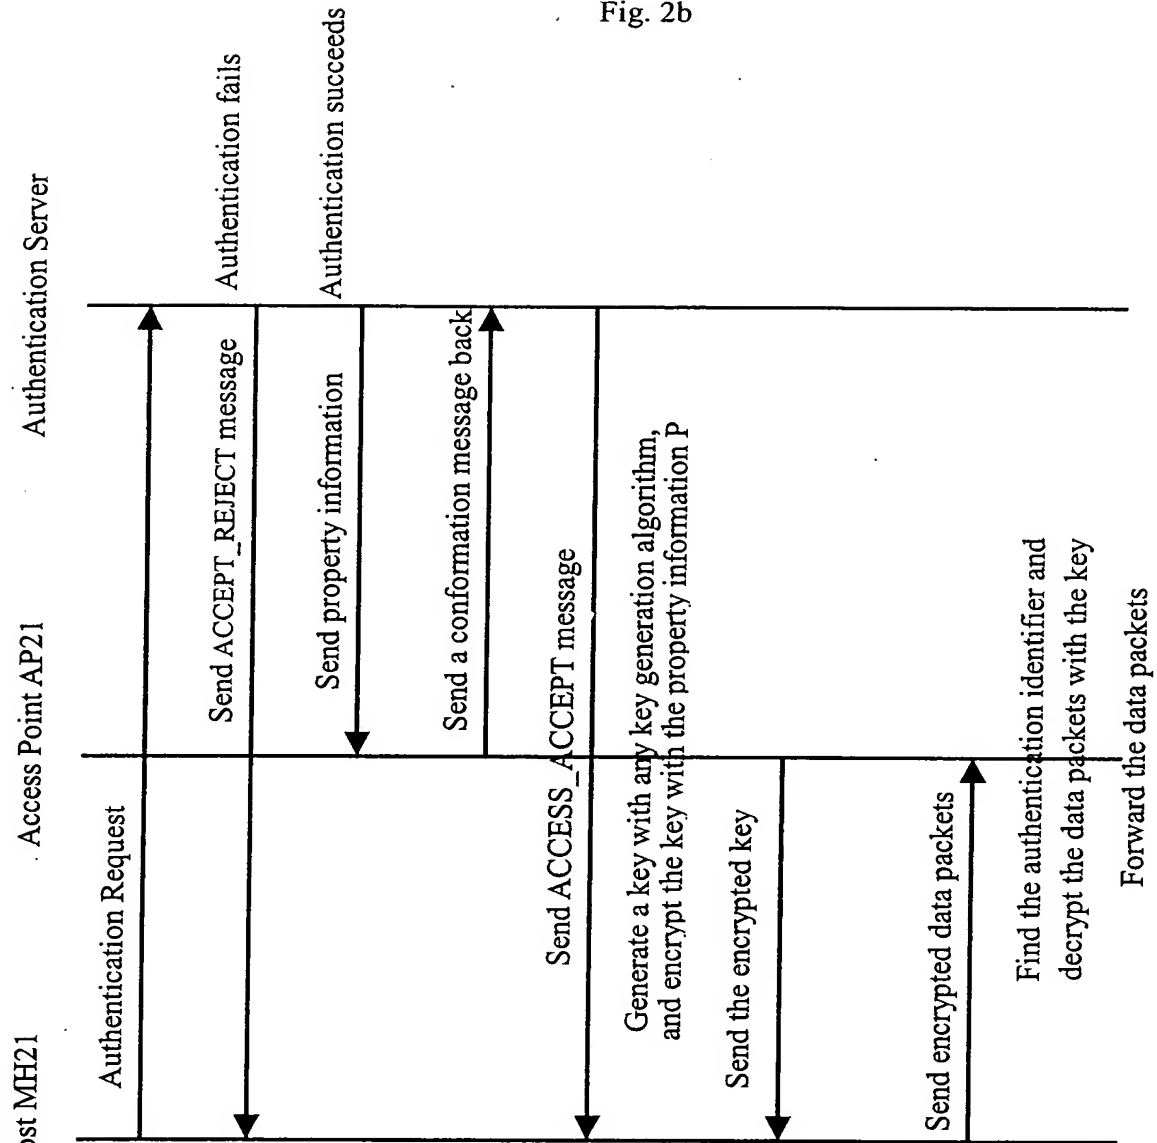

Decrypt the key with the stored property Information P, encrypt data packets with the key, and modify the authentication identifier

Find the authentication identifier and decrypt the data packets with the key  
Forward the data packets

10/506765

Fig. 2c


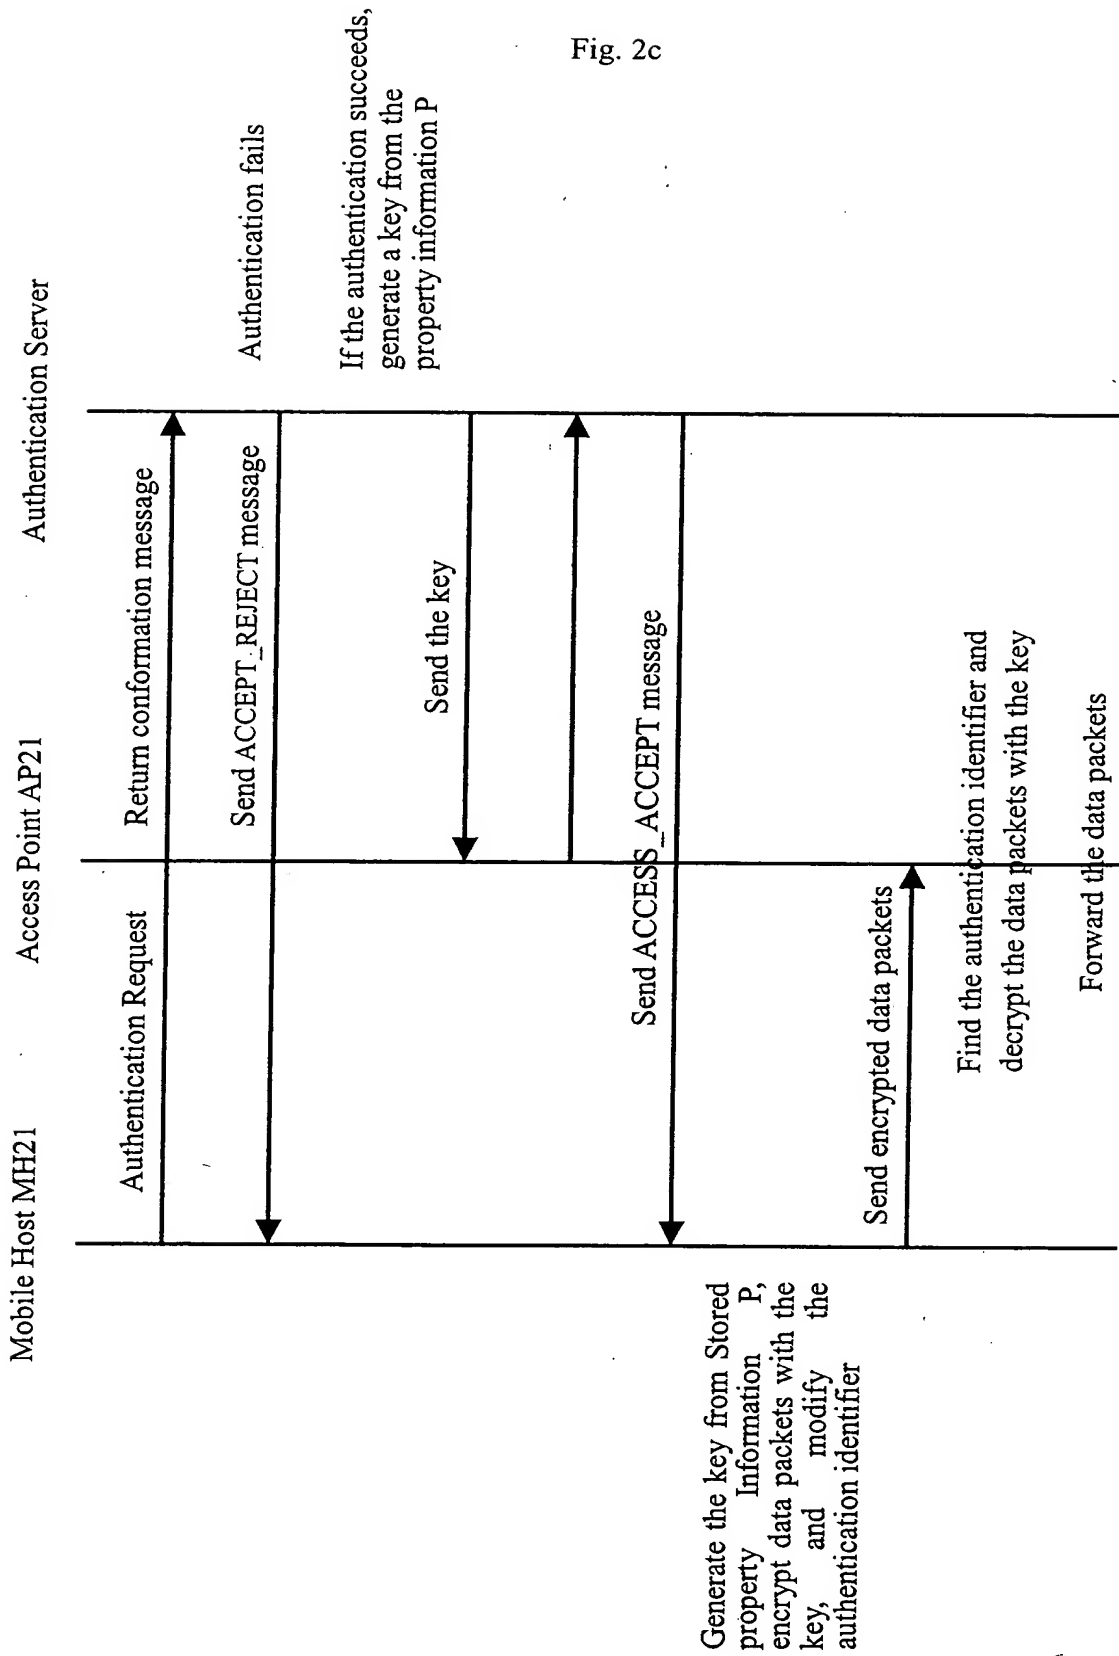


Fig. 2d

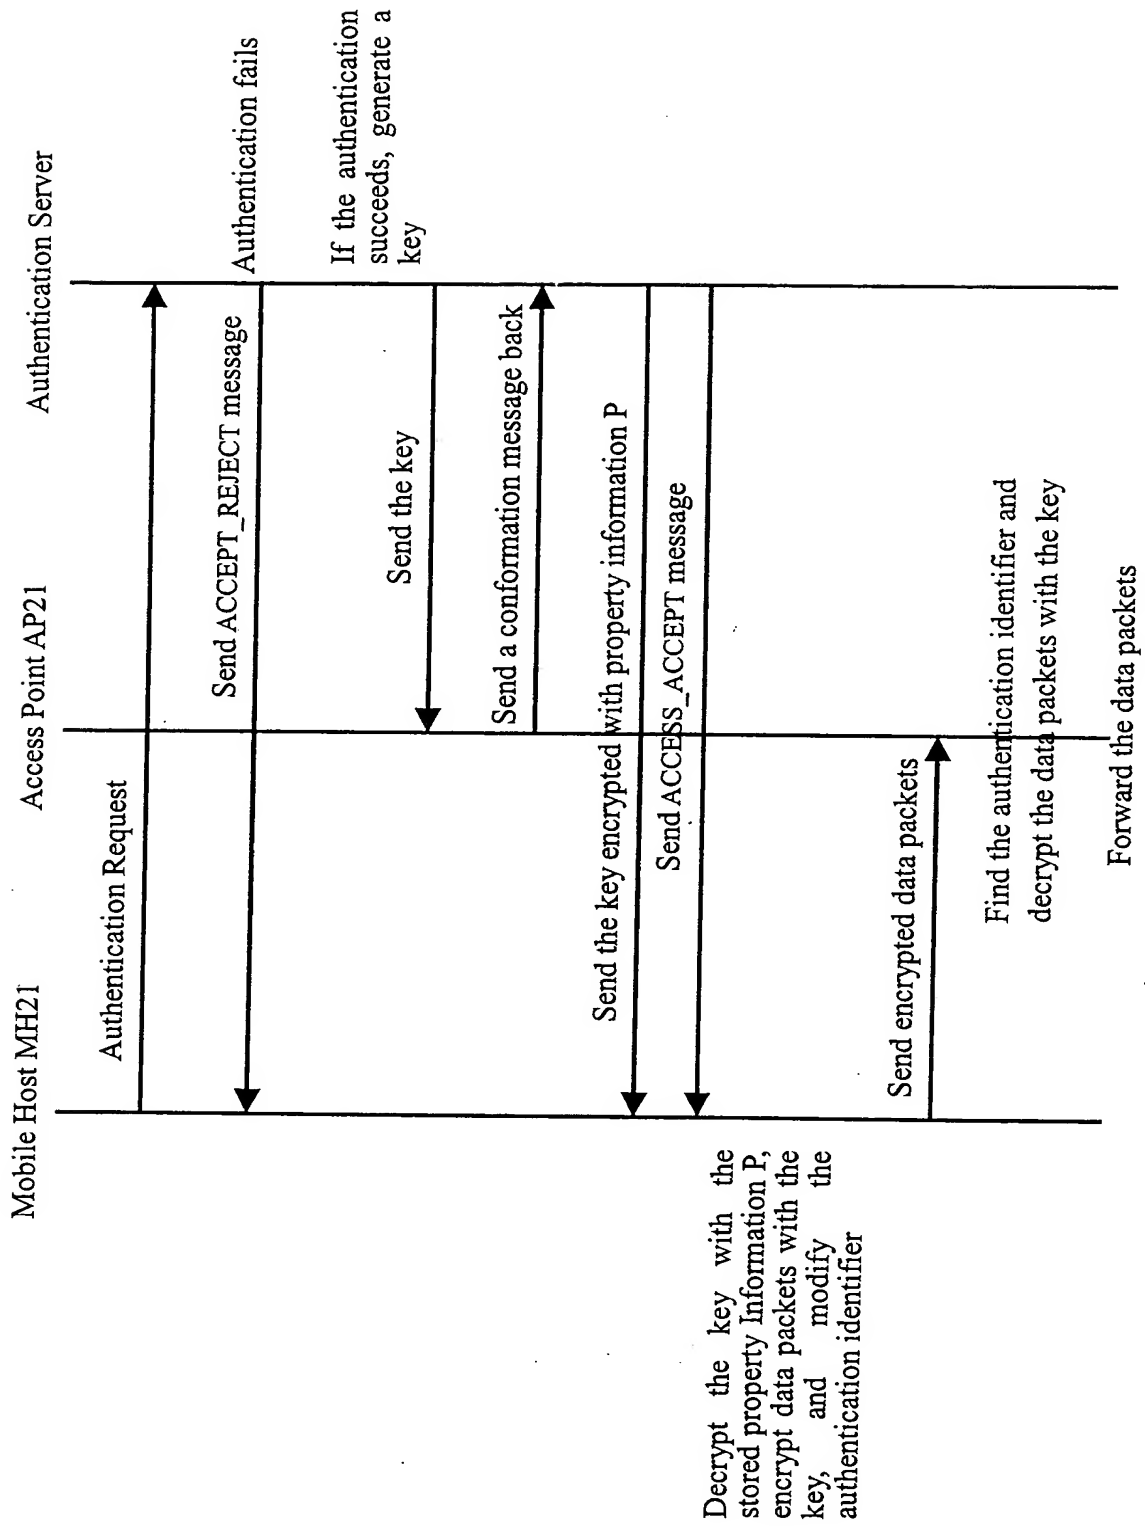

10/506765

Fig. 3a

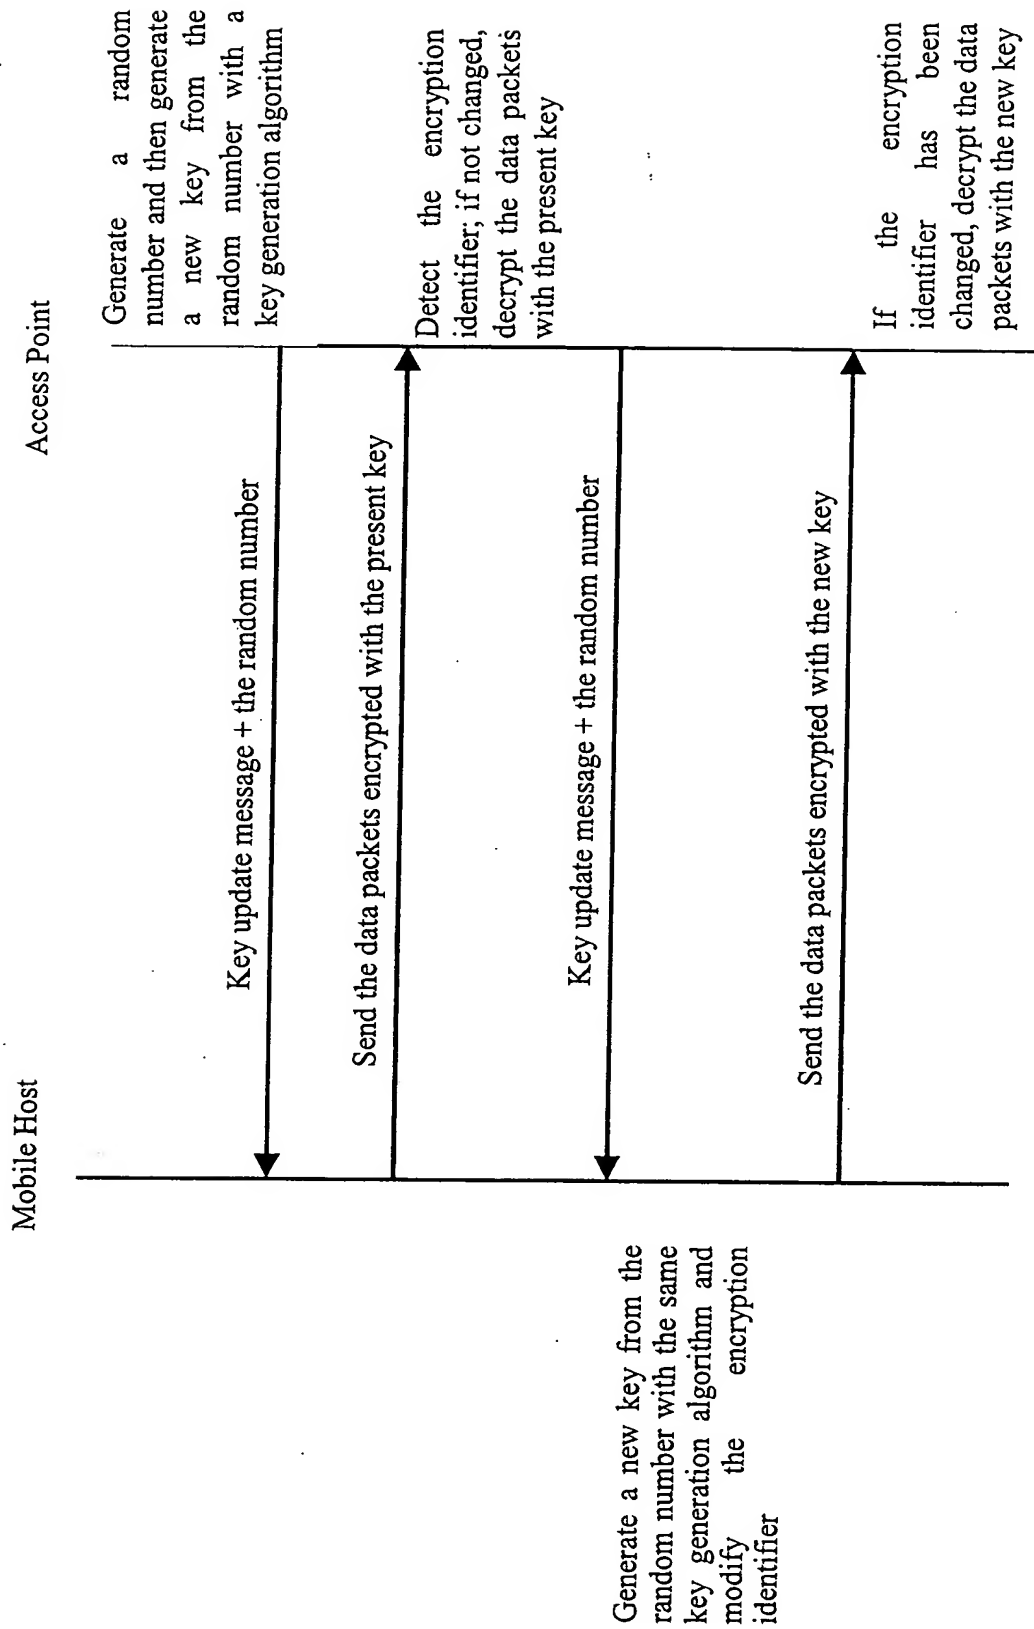


Fig. 3b


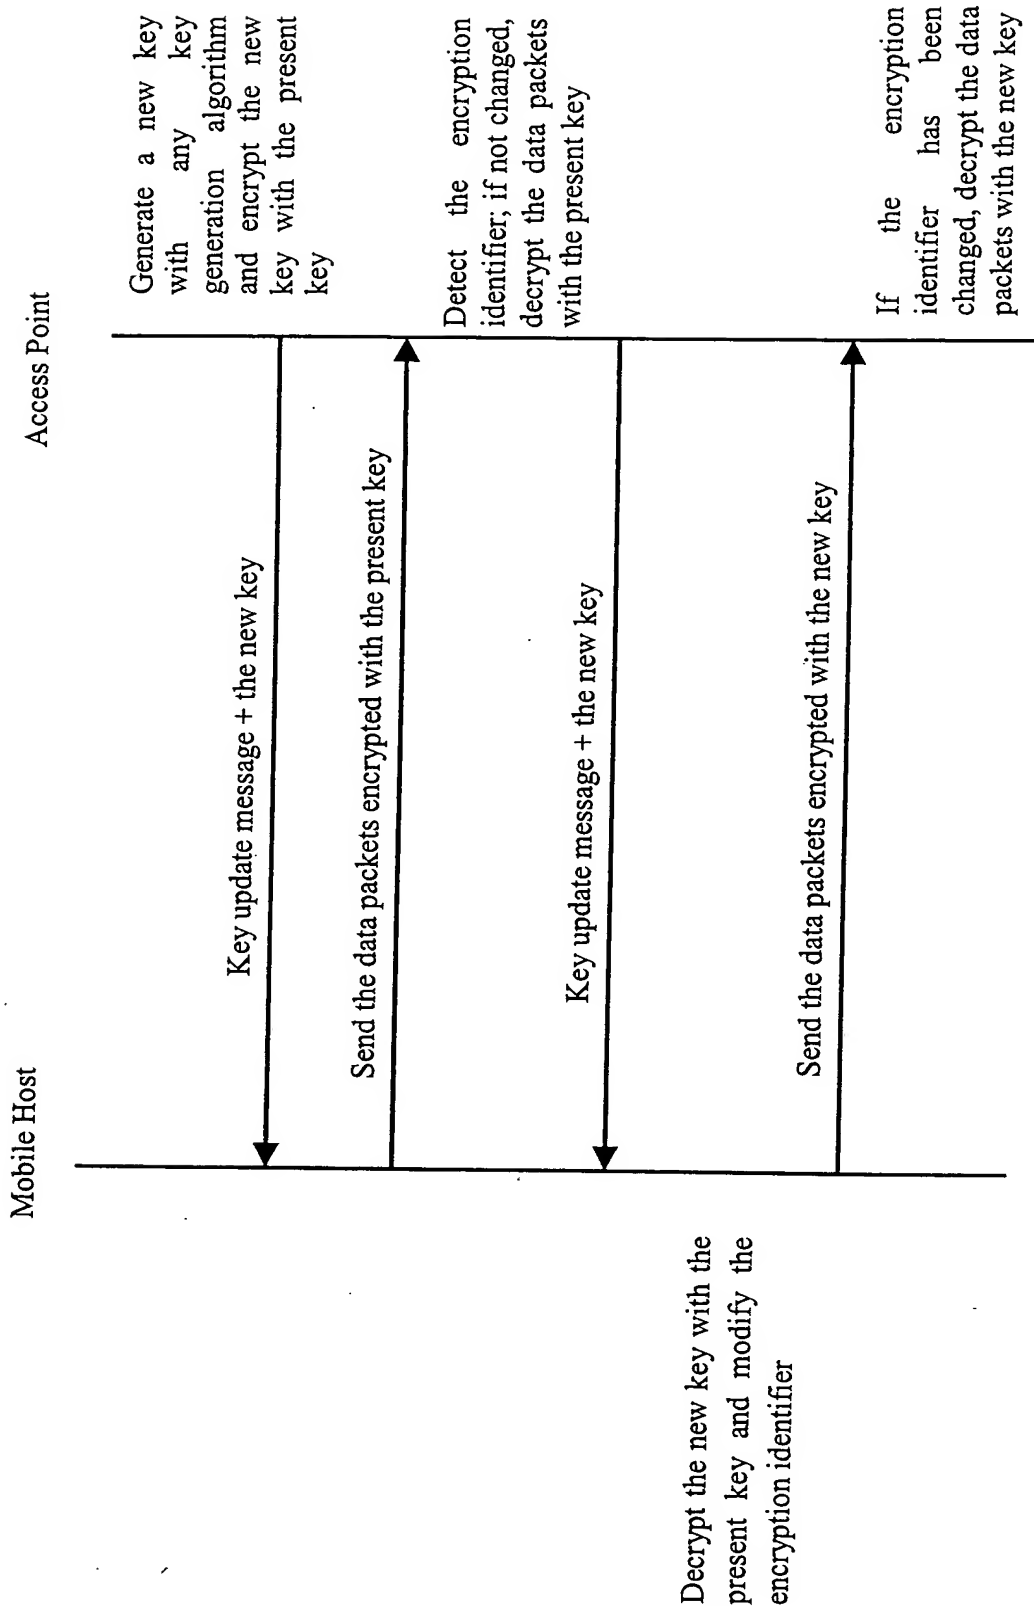


Fig. 3c



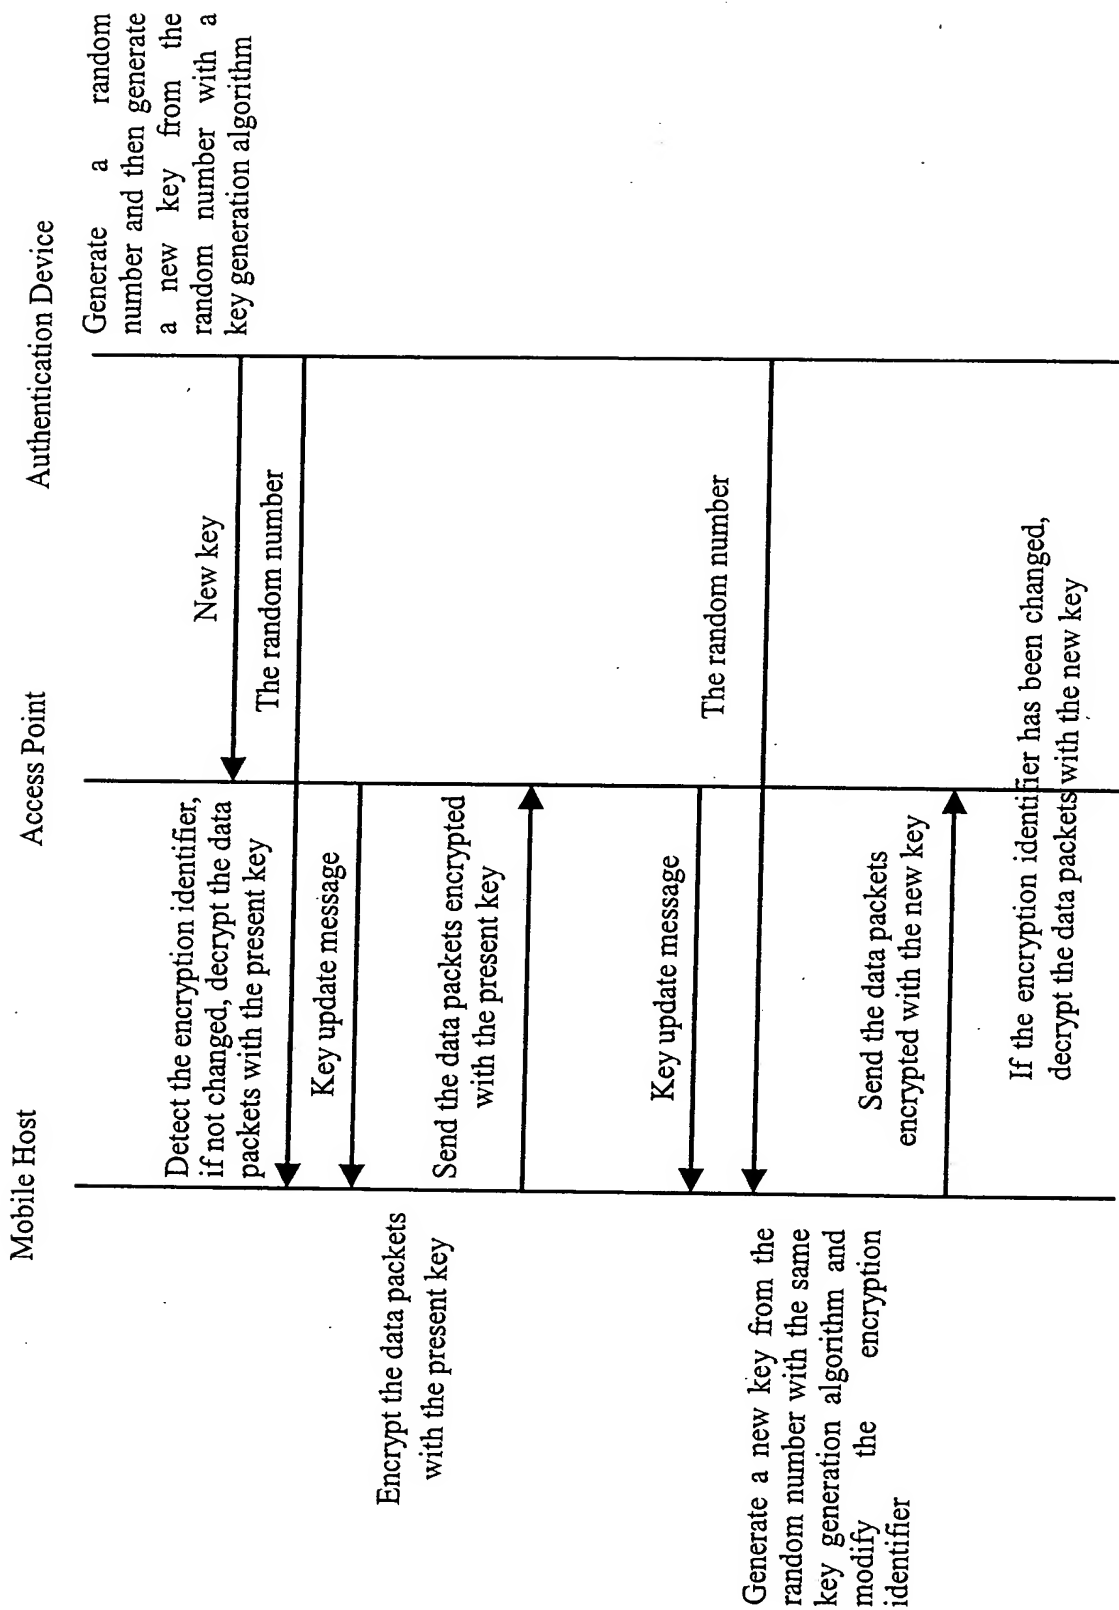

10/506765

Fig. 3d

